




Not to scale

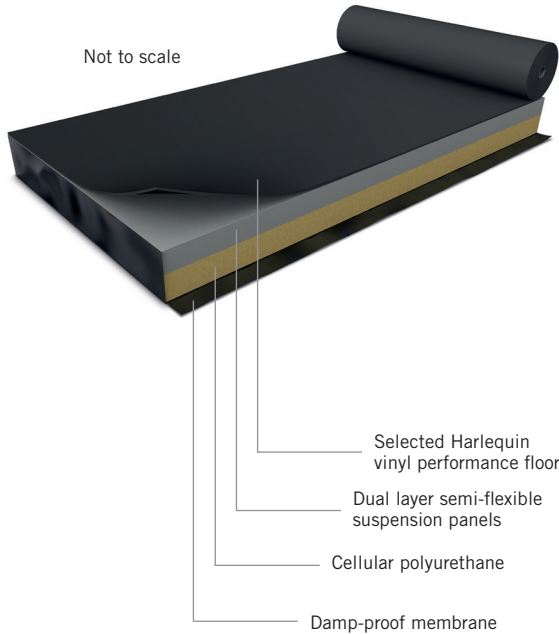


Selected Harlequin vinyl performance floor

Dual layer semi-flexible suspension panels

Cellular polyurethane

Damp-proof membrane

Not to scale

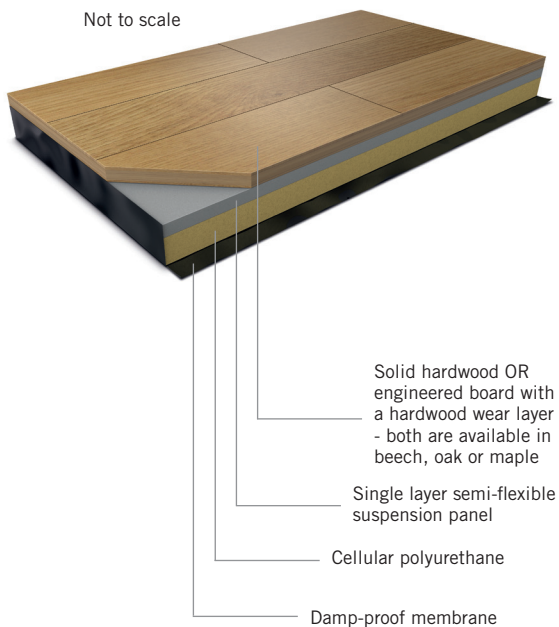

Solid hardwood OR engineered board with a hardwood wear layer - both are available in beech, oak or maple

Single layer semi-flexible suspension panel

Cellular polyurethane

Damp-proof membrane

Harlequin Asia Limited  
2/F The Strand  
49 Bonham Strand  
Sheung Wan, Hong Kong

Tel: +852 254 11 666  
Fax: +852 254 11 999

www.harlequinfloors.com  
hksales@harlequinfloors.com

HONG KONG  
LONDON  
LUXEMBOURG  
BERLIN  
PARIS  
MADRID  
LOS ANGELES  
PHILADELPHIA  
FORT WORTH  
SYDNEY

# Harlequin Activity™

**Harlequin Activity** is a permanently installed sprung floor system, based on the well-established 'triple sandwich' construction originated by Harlequin over 30 years ago. It's a fully-floating system with no fixings to the sub-floor and can be laid on any reasonably smooth and flat surface without prior preparation.

**Harlequin Activity** is shock-damped to avoid a 'trampoline' effect and provides area and point elasticity to offer identical characteristics across the whole floor. It is an 'industry standard' choice with many hundreds of installations worldwide, effectively reducing injuries to both teachers and performers.

**Harlequin Activity** is installed by our own highly-skilled technical team and all work is fully guaranteed. Different surface options include:

- A Harlequin vinyl performance floor, selected from our range
- Solid hardwood - in beech, oak or maple
- Engineered board with a hardwood wear layer - in beech, oak or maple.

If a Harlequin vinyl performance floor is chosen, a colour matched composite edging profile will be installed around the finished edges. If solid hardwood or engineered board is chosen, the skirting will be 'optional'.

## Specification guide

<b>Permanent or Portable</b>	Permanent
<b>Minimum floor thickness (before inclusion of chosen finish)</b>	46mm
<b>Minimum floor weight (before inclusion of chosen finish)</b>	14.1kg/m <sup>2</sup>
<b>Testing standards</b>	DIN 18032-2
<b>Average shock absorption</b>	59.6%
<b>Maximum point load (BS EN 1195)</b>	549kg
<b>Area deflection</b>	7.2%
<b>Rolling load</b>	>1500N
<b>Vertical deformation</b>	3.8mm

## Harlequin's sprung floor application guide

In addition to Harlequin Activity, we also produce a small range of other sprung floors, which are listed below.

✓ = We recommend.

	Allegro	Cascade	Fiesta	FreeStyle	Hi-Shine	Marine	Reversible	Showfloor	Standfast	Studio	Solid hardwood	Engineered board
<b>Activity</b>		✓	✓	✓		✓			✓	✓	✓	✓
<b>Liberty (permanent)</b>		✓	✓	✓					✓	✓		
<b>Liberty (portable)</b>		✓			✓		✓	✓		✓		
<b>Vitality</b>		✓	✓	✓			✓		✓	✓		
<b>WoodSpring</b>		✓	✓	✓		✓			✓	✓	✓	✓

**If you would like further information, advice and/or samples then please contact us.**