

# Harlequin Flexity Plus™



**Harlequin Flexity Plus** is a cost-effective, self-install sprung floor panel system, designed for permanent installation. Panels are laid in a brickwork fashion onto the sub-floor, so that cross joints do not coincide. The panels join together by a special tongue and groove, which are glued together for permanent installation.

**Harlequin Flexity Plus** can be installed by anyone with basic DIY skills and full instructions are provided. It's a cost-effective choice, helping to reduce the injury risks associated with dancing or performing on a hard, unsprung floor.

**Harlequin Flexity Plus** is finished by choosing an appropriate Harlequin vinyl performance floor from our range or an engineered wood finish on a permanent floor.

## Specification guide

|   |                        |
|---|------------------------|
| Permanent or Portable                                       | Permanent              |
| Floor panel size  | 1.125m x 2.250m        |
| Dance surface size  | 1.089m x 2.214m        |
| Minimum floor thickness (before inclusion of chosen finish) | 37mm                   |
| Minimum floor weight (before inclusion of chosen finish)    | 11.85kg/m <sup>2</sup> |
| Testing standards   | BS EN 14904:2006       |
| Average shock absorption                                    | 67%                    |
| Maximum point load (BS EN 1195)                             | 1126kg                 |
| Rolling load  | 1500N                  |
| Vertical deformation  | 3.9mm                  |

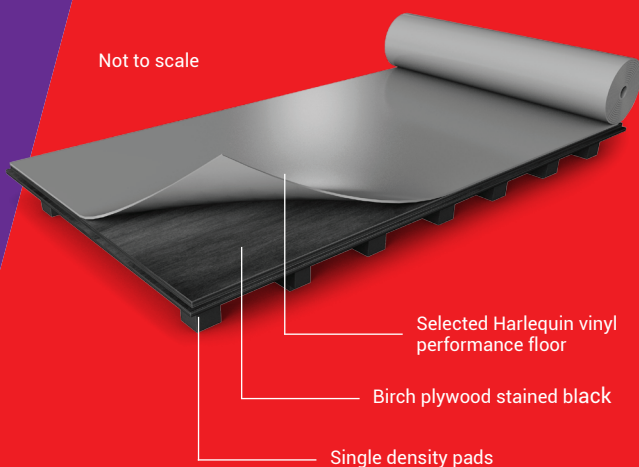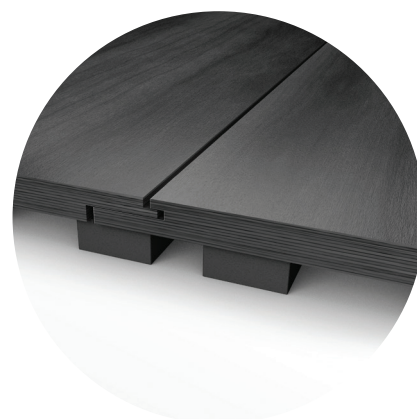

If you would like further information, advice and samples please contact us on +852 254 11 666 or [hksales@harlequinfloors.com](mailto:hksales@harlequinfloors.com)



**HARLEQUIN**  
www.harlequinfloors.com